

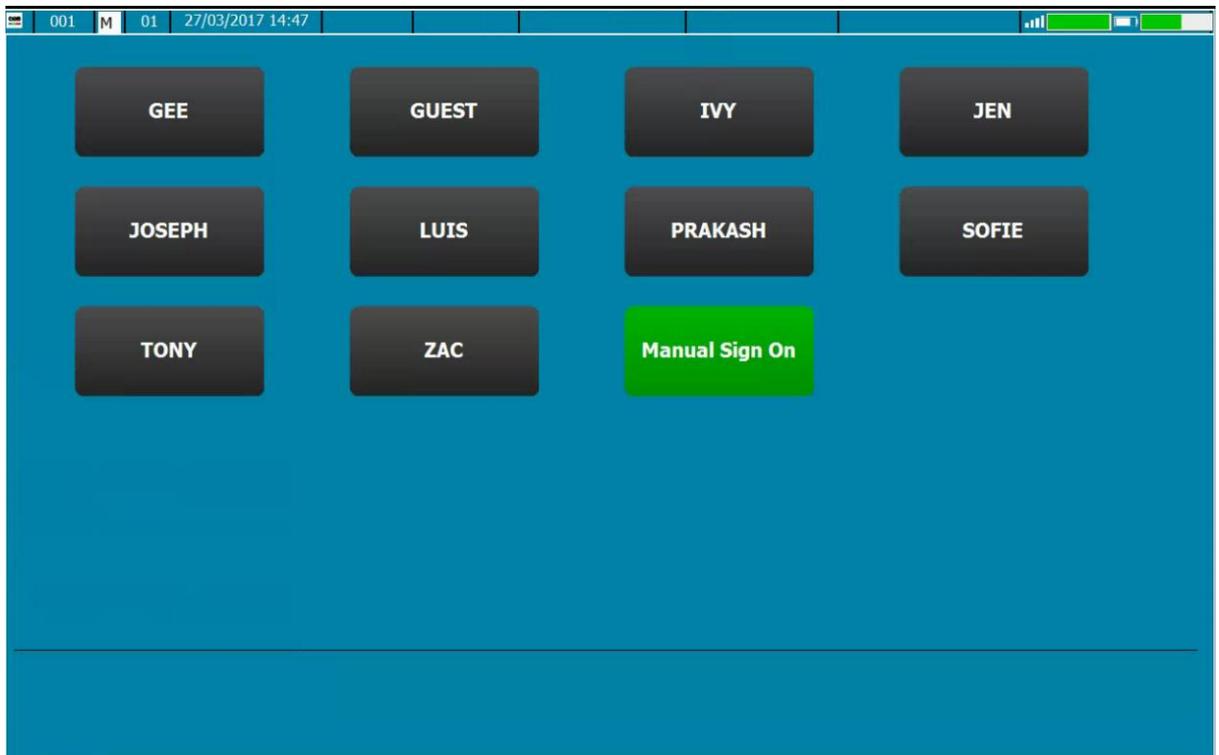


## Tablet Settings and requirements for Touch Version 9

- The tablets require the Touch Wifi Signal installer to be run. This is used to populate the Wifi signal and Battery indicators used for tablets.



- Once the Wifi Signal installer has been run you can then set the tablet mode setting. There are two places where the tablet mode setting can be entered.
  - The Startup Wizard by selecting I'm a Tablet

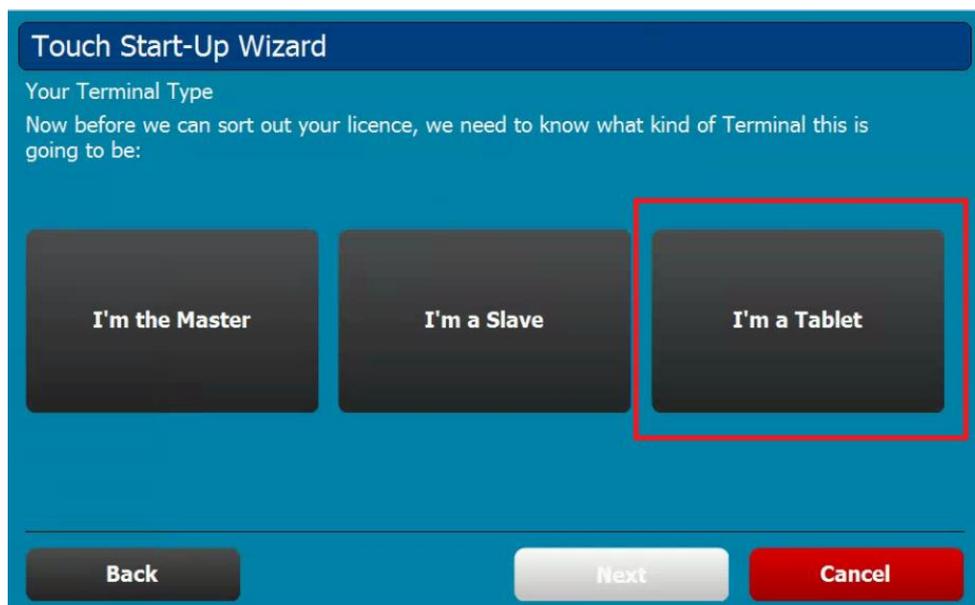

2. The back office system setting as shown below set to YES


The screenshot shows the 'Settings' application interface. On the left, there is a sidebar with buttons for 'All', 'System', 'Sales Viewer', 'Sales', 'Receipt Printer', 'Remote Printer', and 'Accounts'. Below these is a 'Locate...' search field containing the text 'TABLET' and a red 'X' icon, with 'Search' and 'Edit' buttons below it. The main area displays a table of settings under the heading 'Local (modified settings shown in blue)'. The table has two columns: 'Option' and 'Setting'. A single row is visible with the option 'Running on a Tablet?' and the setting 'YES'. At the bottom right, there are 'Save' and 'Exit' buttons.

Option	Setting
Running on a Tablet?	YES


Either method will achieve the same result and set the back office setting. The Startup Wizard is basically a shortcut to enter back office settings.

- Path settings  
Go into Paths in the back office settings

The screenshot shows the main application menu with various options arranged in a grid. The 'Paths' option is highlighted with a red rectangular box. The menu includes options such as 'Sales / Review', 'Products', 'Stock In/Out', 'Reports', 'Customers', 'Bookings', 'Utilities', 'Operators', 'Receipt Setup', 'Hotcodes', 'Reasons', 'Foreign Exchange', 'Post Sale', 'Enquiry Display', 'System Menu', 'Commission', 'Mail Merge Wizard', 'Daily Chalkboard', 'Label Printing', 'Passwords', 'Tenders', 'Charge Sheets', 'Database', 'Import / Export', 'Customer Display', 'Tax Settings', 'Settings', 'Screens', 'Archive Sales', 'Document Settings', 'File Checker', 'Hotel Link', 'Backups', 'Licence', 'Company Details', 'Remote Printers', 'EOD Reset', 'Startup Wizard', and 'Paths'. At the bottom, there is a 'Settings' button, a status bar indicating 'SYSTEM IS RUNNING IN DEMO MODE' and 'CES TS - Version 9.0.036', and an 'Exit' button.

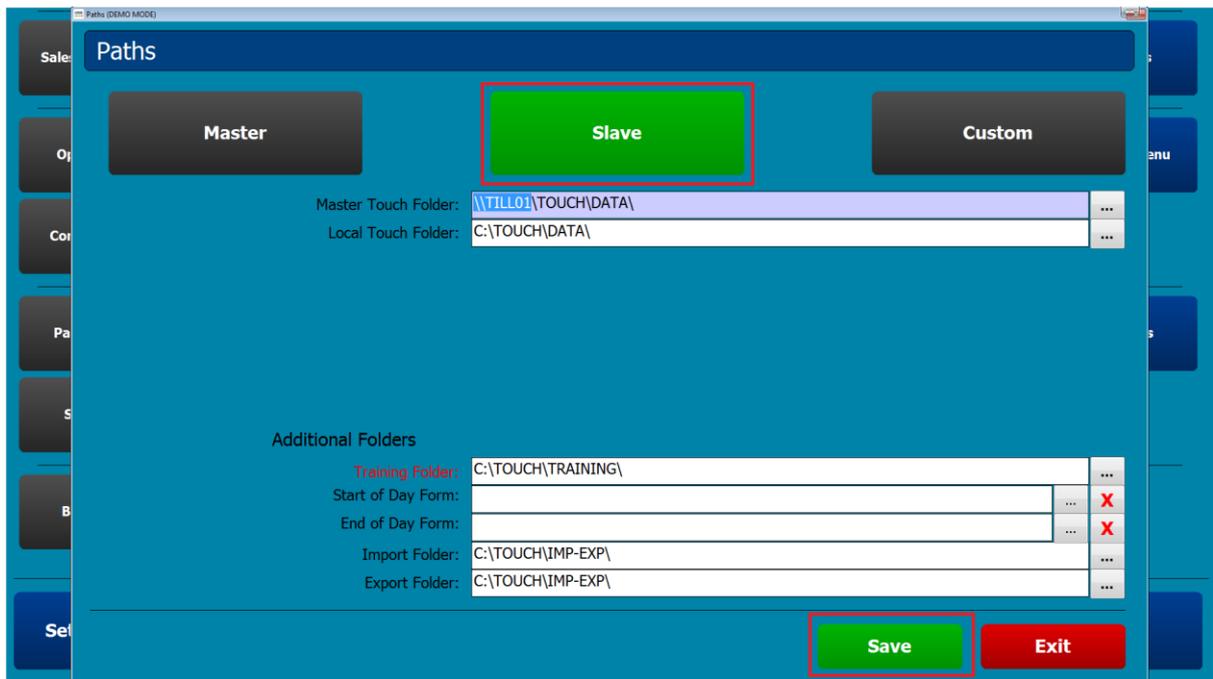

- Make sure the Master Touch folder is shared with full read/write permissions
- Select the Slave option as highlighted above (this is the same procedure as for a slave terminal)
- Enter the PC name for the Master Till (or PC that is acting as the Master) into the top box 'Master Touch folder: Example as shown above 'C:\' has been replaced with \\TILL01\
- Press the Save button at the bottom of the screen
- If the path setting is good and the Master Touch folder can be located the path settings will be saved and the screen will close
- If there is an issue with the network path to connect to the Master Touch folder the message below will show and the path settings will not be updated.

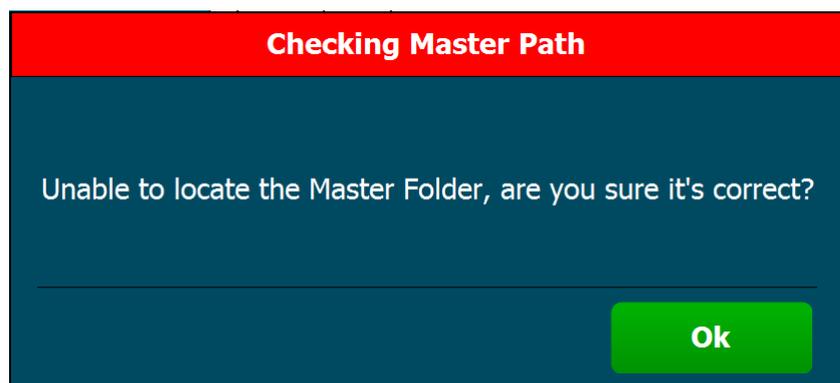

- The tablet by default requires the wifi signal to be at 70% to be able to access charge sheets. This setting can be adjusted if required but using the touch.ini setting as shown below.

Touch.ini setting TABLETSIGNALMINIMUM=XX

- When the tablet starts up and goes into sales mode it will sync data with the master. Any changes made such as price updates or anything that affects the data will not get updated on the tablet until it next syncs.

There is a button command SYNCDATA that can be used on tablets to do an immediate sync